

GP360

PART ECO

Ground Lowering,
Anti-Vandal, Robust
and Easy-To-Use **Single
Axle Mobile** Welfare
Accommodation Unit.



**HSE
& CDM
COMPLIANT**

PART ECO

MOBILE

SEATS UP TO
6 PEOPLE



INNOVATION THAT WORKS.



Seating area



Toilet wash area



Warm Room



Delivery of hot water



Well equipped canteen

Comfortable, Compact and HSE compliant.

The **groundhog** mobile GP360 Part Eco is a lightweight and compact towable unit that meets HSE & CDM requirements and provides all your on-site needs in one small package.

The units are suitable for accommodating six people, which provides pleasant and safe working environments, ideal for rental companies and contractors.

Easily towed, one man operation secured and manoeuvred on site, in less than 3 minutes. Its many safety features make it a **high secure and money saving choice of welfare unit.**

The **GP360 Part Eco** offers offers the legendary robustness and ease of use of the standard Groundhog Mobile welfare unit whilst offering a green environmental solution.



Recycled non-slip flooring



Fully hot-dipped galvanised chassis



230V 1kW air blown heater



Warm water from an on-board 230V heating system



12V LED lighting with PIR



12V socket & USB port connection



Welded boss for removable low level lifting eyes



Fuel Active system



Lowered & secured in 3 minutes

KEY FEATURES at a glance

For full specification, please visit
www.groundhog.co.uk



Length	3655 mm
Length (including drawbar)	4920 mm
Height (on wheels)	2.9 m
Height (on ground)	2.5 m

Generator	6 kVA
Unladen Weight	1725 kg
Possible Gross Weight	1800 kg*
Solar Panel	Optional

Fresh Water	20 Litres
Waste Water	20 Litres
Toilet Tank Size	280 Litres
Fuel Tank Size	58 Litres



1 Canteen Area

- Table and bench seating for up to 6 people
- 12V LED lighting with PIR
- 230V 1kW air blown heater
- Warm water supplied by a 230V on-board heating system
- Large stainless steel sink c/w warm water tap
- 230V single 2Amp socket outlet for charging mobiles and laptops
- Generator start panel c/w hour run meter
- Fresh & waste water containers (20 Ltr cap each)
- 12V pump for water system
- 12V socket and USB
- Carbon monoxide monitor and smoke alarm

2 Toilet Area

- Plastic recirculating toilet
- 12V LED lighting with PIR
- Forearm wash basin c/w warm water tap
- Warm water supplied by a 230V on-board heating system

3 Generator/ Warm Room

- 12V LED lighting with PIR
- 240V tubular heater
- Access to fuel tank with separate fuel level gauge (58 Ltr cap)
- Ventilation panel
- Fuel Active system
- Fuel tank runtime = approx. 25 hours

PART ECO


Option from **groundhog**

The latest concept in 12V technology delivers power to the LED lighting and USB sockets without the need for the generator to be running, resulting in **lower CO₂ emissions and reduced generator runtime.**

Part Eco units are fitted with 12V LED lighting complete with PIR sensors to automatically sense movement, turning lights on or off as required.

Situated in the canteen, toilet and generator room, this feature gives owners and end users savings by way of **reduced fuel usage, reduction in generator servicing, longer generator life, fewer breakdowns and reduced noise pollution.**

Featuring BATTERY POWERED LED lighting & USB sockets

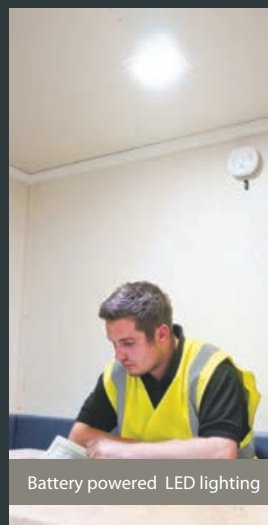

Battery powered LED lighting



Battery powered 12V socket and USB

* Fully laden gross weight exceeds maximum towing capacity, unit should be transported to site prior to making site ready.