



For full details on all our ranges please visit our website at www.groundhog.co.uk

GP360^D

Comfortable, compact and compliant, easily towed and secured in minutes saving time and money.

The single axle Groundhog Mobile Welfare Unit GP360D is a lightweight and compact towable unit that meets HSE & CDM requirements and provides all your on-site needs in one small package.

The units are suitable for accommodating six people, which provides pleasant and safe working environments, ideal for rental companies and contractors.

Easily towed, one man operation secured and manoeuvred on site, in less than 3 minutes. Its' many safety features make it a high secure and money saving choice of welfare unit.

- > Warm water supplied by an on-board heating system
- > Spacious, well equipped canteen / 6 person seating area
- > Secured in less than 3 minutes
- > High security doors and windows
- > Meets HSE & CDM requirements
- > Removable low level lifting eyes
- > Fully galvanised chassis



Specifications

- > Dimensions:
3655mm (L) x 2300mm (W)*
- > Dimensions including drawbar:
4920mm (L) x 2300mm (W)*
- > Weight:
- > Unladen **1,700kg***
- > Possible Gross: **1,815kg**

The GP360^D complies with Health & Safety regulations which guarantees certain facilities for contractors working on site.

- | | | |
|----------------------|------------------------------------|---|
| Regulation 20 | Sanitary Conveniences | ✓ |
| Regulation 21 | Washing Facilities | ✓ |
| Regulation 22 | Provision for Drinking Water | ✓ |
| Regulation 23 | Provision for Drying Clothing | ✓ |
| Regulation 24 | Facilities for Changing Clothing | ✓ |
| Regulation 25 | Facilities for Rest & to Eat Meals | ✓ |

1. Welfare Area


- Table and bench seating for up to 6 people
- Microwave and kettle – both hard-wired
- Fresh and waste water containers (20L cap each)
- Warm water supplied by on-board heating system
- Large stainless steel sink c/w warm water tap
- 12V pump for water system
- 1kW electric wall mounted heater
- 230V 600mm strip light
- Single 230V 2amp socket
- Consumer board c/w RCD & MCB's
- Generator control panel with hour run meter
- Paper towels, liquid soap and cup dispenser
- Carbon monoxide monitor and smoke alarm
- Fresh drinking water container (20L)
- High level vent

2. Toilet Area

- Plastic recirculating toilet c/w ventilation pipe
- Forearm pedestal wash basin c/w warm water tap
- Toilet tank size: 280L
- Toilet roll holder
- 12V LED light with PIR
- Warm water tap supplied by on-board heating system
- Liquid soap & paper towel dispenser

3. Warm Room / Generator Area

- 230V Bulkhead light
- 230V tubular heater
- Coat hooks
- Ventilation panel
- 6kVA diesel generator with exhaust venting through roof area
- Access to fuel tank with separate fuel level gauge (fuel tank capacity = 58L)
- Fuel Active system

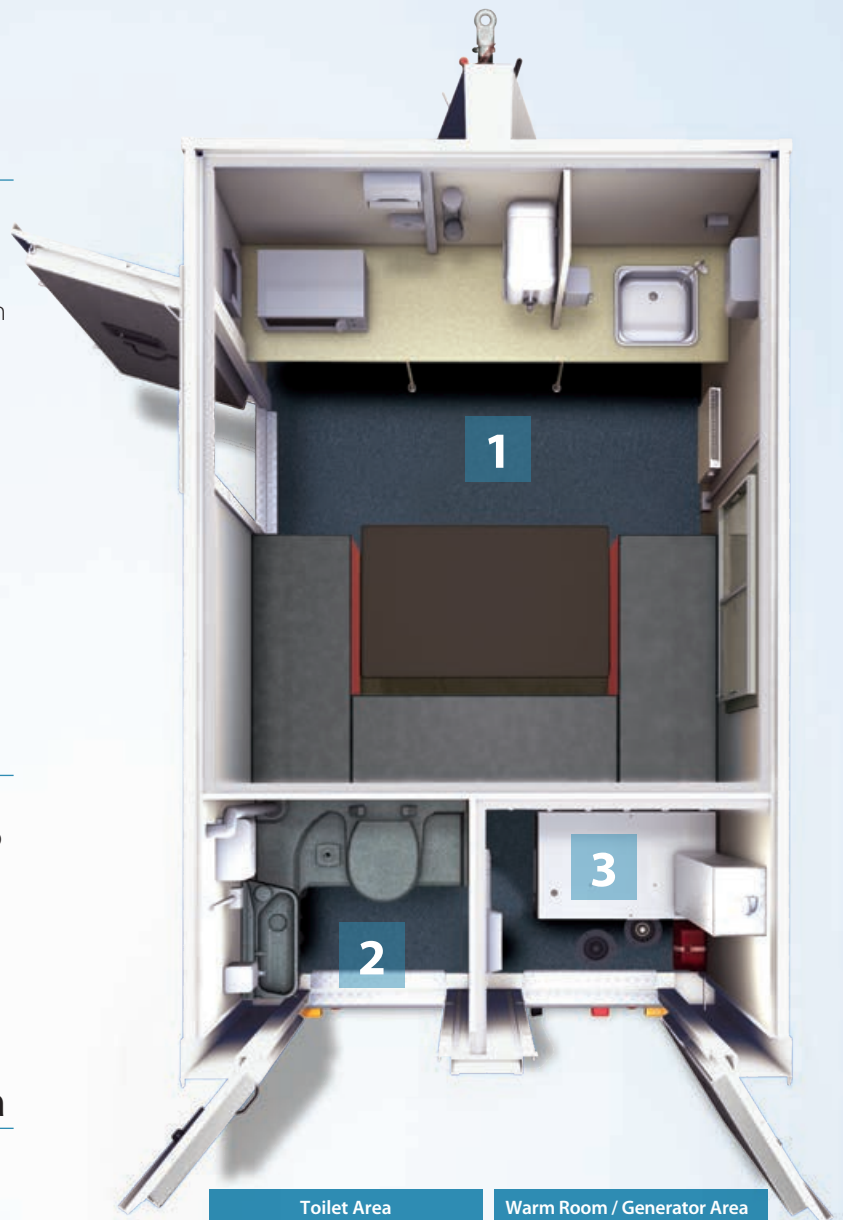

Secured in less than 3 minutes

Easily towed, one man operation secured and manoeuvred on site. Its many safety features make it a high secure and money saving choice of welfare unit for rental companies and contractors.



Unhitch from towing vehicle and operate hydraulics using the push button controls

1 min



Lower unit to the ground and unplug controls

1 min



Close & lock canopy to protect towing facility

2 min



3 min