

Hogbutt Rain Harvester

Rainwater collection and filtering device, offering total consideration towards the environment

The **Hogbutt** unit is a rain harvester designed to feed toilets and shower rooms for various cabins situated on site for long periods. Water savings can be shown by collecting rainwater to service toilets, utilize fresh water for showers and hand wash. The system is primarily used in conjunction with waterless urinals but can also be used to flush standard urinals.


The Hogbutt system is connected to the mains water supply which will service the smaller tank to feed sinks etc, rainwater can be captured from the roof of the Hogbutt or from cabin guttering. Rainwater is stored in the large tank and used to service the toilets. In the case of no rain a simple float switch will divert fresh water into the rainwater tank, so a constant source is maintained.

SPECIFICATIONS

Dimensions: 3200mm (L) x 1650mm (W) x 2320mm (H)

Rainwater Capacity: 1000 litres

Freshwater Capacity: 650 litres

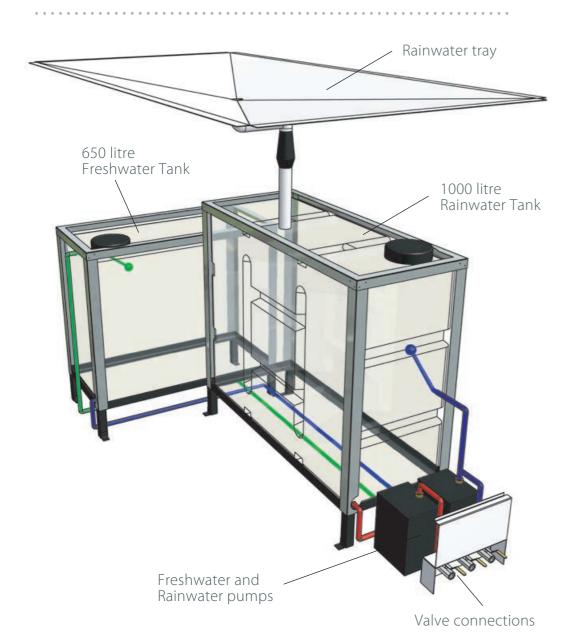





GenQuip

Aberafan Road, Baglan Industrial Park, Port Talbot SA12 7DJ.

Tel +44 (0)1639 823484 e-mail sales@genquip.co.uk www.groundhog.co.uk The 1.5" stainless Steel ball valves connections can be contained within a lockable steel housing if required



Power input socket for 240V mains electricity supply